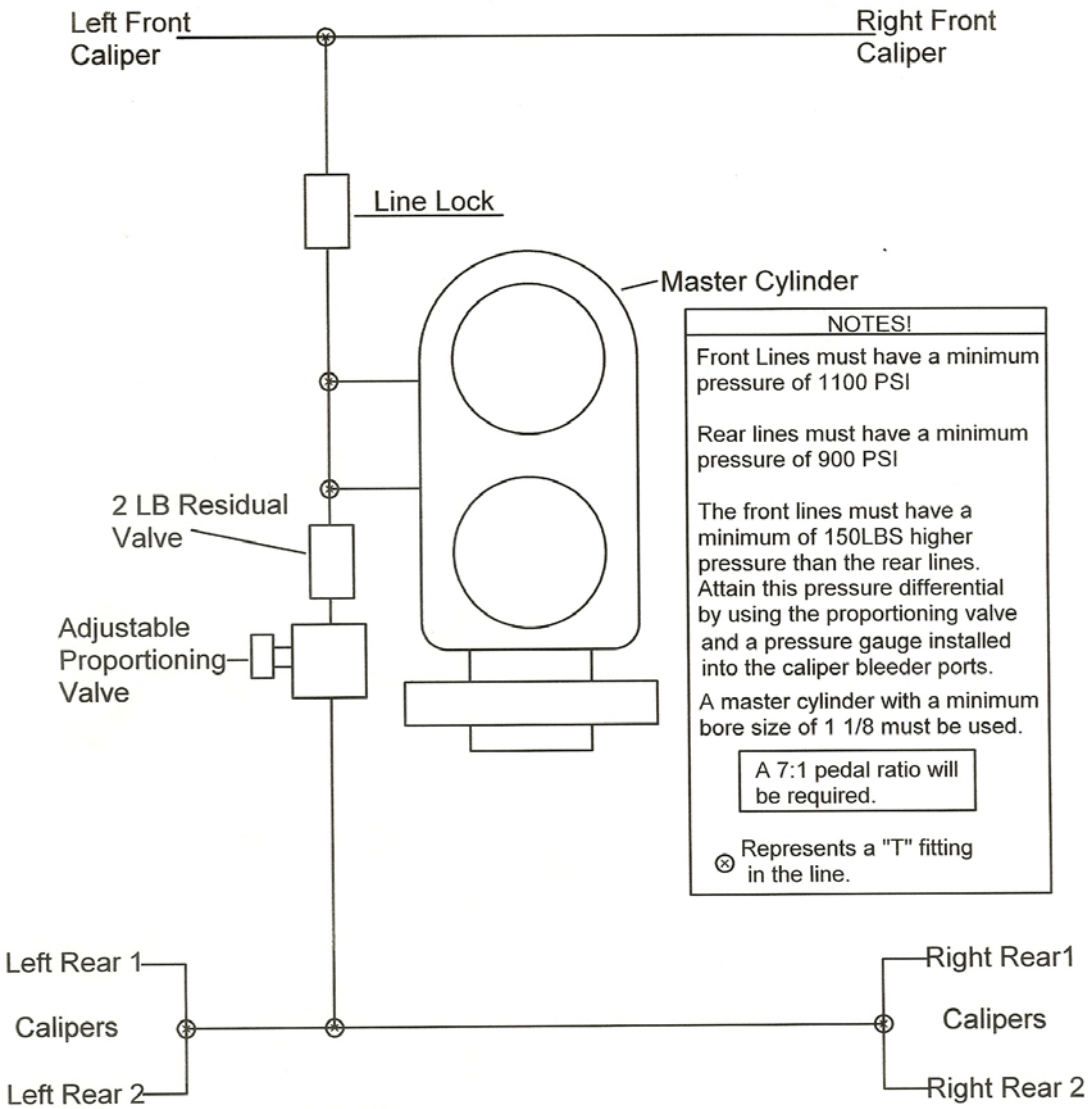

NOTES!

Front Lines must have a minimum pressure of 1100 PSI

Rear lines must have a minimum pressure of 900 PSI

The front lines must have a minimum of 150LBS higher pressure than the rear lines. Attain this pressure differential by using the proportioning valve and a pressure gauge installed into the caliper bleeder ports.

A master cylinder with a minimum bore size of 1 1/8 must be used.

A 7:1 pedal ratio will be required.

⊗ Represents a "T" fitting in the line.